

Rapid Deployment External Leak Detection System (ELDS) - Solution Sheet

Description

The globally scalable Rapid Deployment ELDS was developed as an IIoT solution bundled with Syscor's hydrocarbon leak detection sensors for sites that lack power but are within cell range.

Applications

The Rapid Deployment ELDS offers end-to-end above and below ground hydrocarbon monitoring for well sites, water bodies, production facilities, pipeline right-of-ways, and other applications (butane and heavier).

Detection and Measurement Capabilities

Syscor's passive Hydrocarbon Detector with HDPE enclosure (HCD-P) sensor probe contains two polymer absorption (PA) sensors offering a high signal-to-noise ratio, methane immunity, and moisture resistance. Up to two HCD-P sensor probes with four PA sensors may be used with each Rapid Deployment ELDS.

Communications & Power

Alerts are transmitted through cellular networks using industry standard protocols. No reconfiguring of existing systems is required. Two lightweight and field replaceable lithium thionyl chloride batteries provide 2+ years of power. As an alternative, Syscor's external lithium thionyl chloride battery packs provide up to 10 years of power.


Installation

The Rapid Deployment ELDS can be mounted using standard hardware. Magnets may also be used on flat steel surfaces.


A robust, lockable enclosure protects internal components from harsh environmental conditions.



Rapid Deployment External Leak Detection System

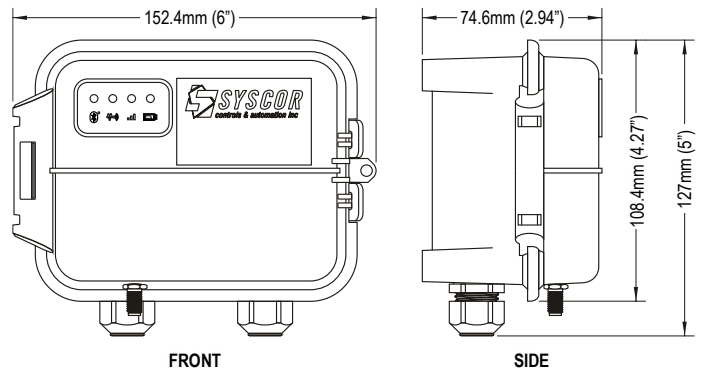

HCD-P Sensor Probe

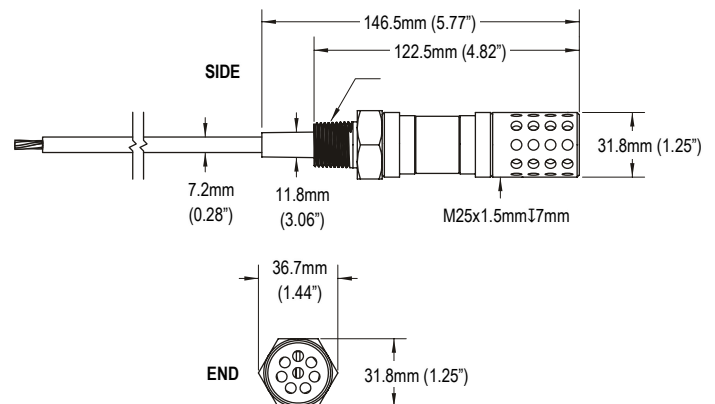

Specifications

Functional Specifications

2G	GSM 850, GSM 900, DCS 1800, PSC 1900
3G	FDD B1, B2, B4, B5, B8
LTE Category 1	Verizon: Bands 2, 4, 13 AT&T, T-Mobile: Bands 2, 4, 5, 12 with 3G/2G fallback
Configuration and Management	Digi Remote Manager/Local USB to Serial CU
Remote Data Access	Modbus RTU and ASCII
HMI	Options: Digi HMI alone or Syscor's cloud monitoring software pulling data through the Digi HMI

Physical Specifications

Power Supply	<p>Rapid Deployment ELDS Battery Pack: Lithium thionyl chloride, non-rechargeable, field replaceable, 7.2 V, 14.5 Ah; Lifespan approximately 2 years at 1 sample per minute and 1 data upload per day. Note: alarm notifications occur immediately upon reaching setpoint.</p> <p>Syscor's Optional External Battery Packs:</p> <ol style="list-style-type: none"> 1) Lithium thionyl chloride, non-rechargeable, field replaceable; 4-cell (7.2V 38.0Ah 273.6Wh); Lifespan up to 3 years depending on update rate 2) Lithium thionyl chloride, non-rechargeable, field replaceable; 24-cell (7.2 V, 228Ah, 1642Wh); Lifespan approximately 10+ years depending on update rate
Communication	HCD-P to Rapid Deployment ELDS: Proprietary Syscor protocol; Rapid Deployment ELDS to IIoT cloud network: Cellular
Enclosure	Rapid Deployment ELDS: Lexan/IP66 HCD-P: High density polyethylene (HDPE)
Antenna Options 2.4GHz	Linear, direct/SMA male, straight, 3dBi; VSWR <3:1; <5:1 at 2500-2690MHz<3:1; 50Ohms impedance; 3G/4G/LTE (699-960/1710-2690MHz); ABS material: 40g (1.4oz) WxHxT: 3.80cm (1.45in), 19.6cm (7.71in), 1.38cm (0.54in)
Antenna Port	External SMA
Sensor Probe Ports	2x HCD-P sensor probes
Sensor Probe Wiring	4x1 conductor (Black, Red, White, Green); 20 (7/28) AWG Tinned Copper
Weight	304g (Rapid Deployment ELDS + Antenna); 42.9g (HCD-P)
Mounting Options	Standard Installation hardware or magnetic base provided by Syscor


Performance Specifications

Electromagnetic Compatibility (Immunity)	EN 55024:2010
Operating Temp.	-35°C to +60°C [-31°F to +140°F]
Hydrocarbon Detection	Syscor's HDC-P sensor probe with Polymer Absorption Sensors (PA) sensors reliably detects direct hydrocarbon contact (butane and heavier); the probe operates underground and within air, hot and cold water, and ice.

Certifications

Rapid Deployment ELDS (CSENSE-A310)

USA	C-UL-US listed E165880 Class I, Division II, Groups A, B, C, and D, T6	FCC: R17LE910NAV2 & QQQBLE112 AEx nA IIC T6 Gc
Canada	C-UL-US listed E165880 Class I, Division II, Groups A, B, C, and D, T6	IC: 5131A-LE910N & 5123A-BGTBLE112 Ex nA IIC T6 Gc
Europe	Ex II 3G DEMKO 16 ATEX 1717X	Ex nA IIC T6 Gc

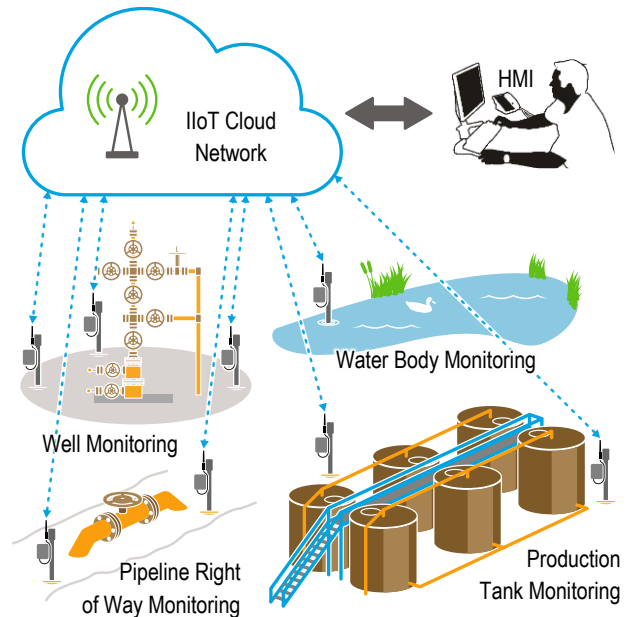

Learn More

HCD-P Hydrocarbon Detector Probe with HDPE Enclosure

syscor.com/downloads/syscor_spec-sheet_hcdp-probe_en_80167.pdf

Stackable Monitoring Well

syscor.com/downloads/syscor_spec-sheet_stackable-monitoring-well_en_80185.pdf

PolyFluoro Wicking Sleeve

syscor.com/downloads/syscor_spec-sheet_polyfluoro-wicking-sleeve_en_80183.pdf